

CLEANPOXY MULTI MOLDING

Provide good leveling and clear surface by filling in cracks before applying top coat

Multi-Purpose transparent molding resin with excellent adhesion and dry film hardness.
Suitable to repair and fill in cracks before applying transparent top coat.
Prevent contamination and strengthen weak bond between gravel materials as top coat.

CLEANPOXY MULTI MOLDING!
Transparent molding resin as multipurpose
use in interior and exterior design

Available for use in repairing cracks on concrete and molding resin between gravel materials



CLEANPOXY MULTI MOLDING

Multi-Purpose transparent putty with flawless finish CLEANPOXY MULTI MOLDING

Provide good leveling and clear surface by filling in cracks before applying top coat



Do you need Multi-Purpose product for
repairing cracks on concrete?
applying on gravel interior floor?
transparent molding resin?



Flawless finish
Solid bond between gravel materials
Multi-Purpose transparent putty!



QR code
for product guide

Product information



Recommended for floor coating


Use in floor coating with excellent
adhesion and durability and molding
resin between gravel materials



Excellent dry film hardness

Suitable for use in molding resin
with solid dry film hardness

Reference

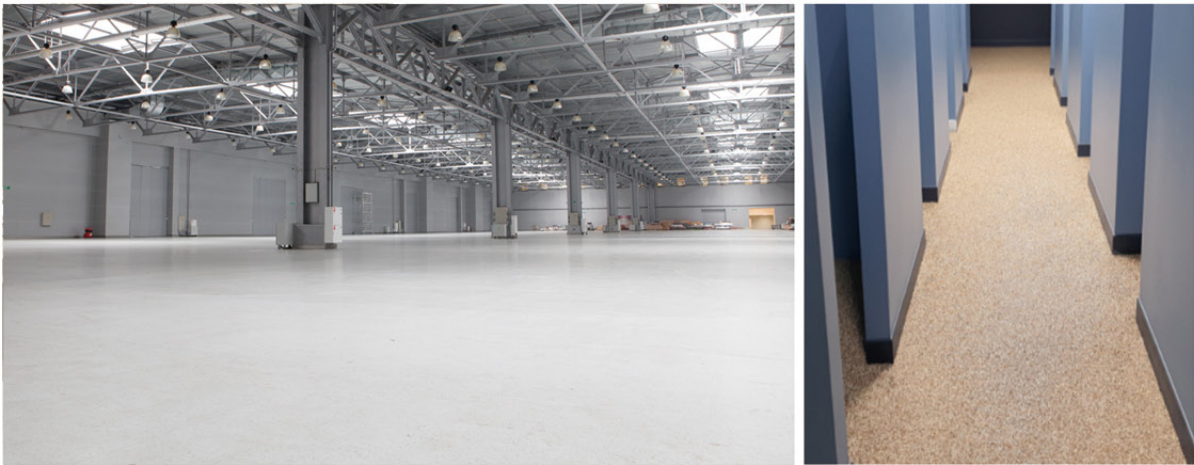

Specification



Paint type	Modified epoxy / Modified amine (2K)
Specific gravity/SVR	Approx.1.1 / 95±3 %
Theoretical Coverage	0.55 kg/m ² (based on 0.5mm)
Thickness of dried film	0.5~1mm
Mixing ratio	base(A) / hardener(B) = 2.5 / 1 (wt.)
Color	Transparent
Gloss	Glossy
Shelf life	12 months
Package	9L, 3L (A+B)