
YEGREENA FLOOR COAT(W)

Water-borne urethane transparent flooring for interior old film repair and new decoration floor finishing

YEGREENA FLOOR COAT(W) is a water—borne urethane type with almost no solvent odor. It is a decorative floor finish that is resistant to yellowing, scratches, and low gloss.

Application

For repair of existing epoxy-type interior flooring (scratch, low gloss, etc.), for new decoration finishing

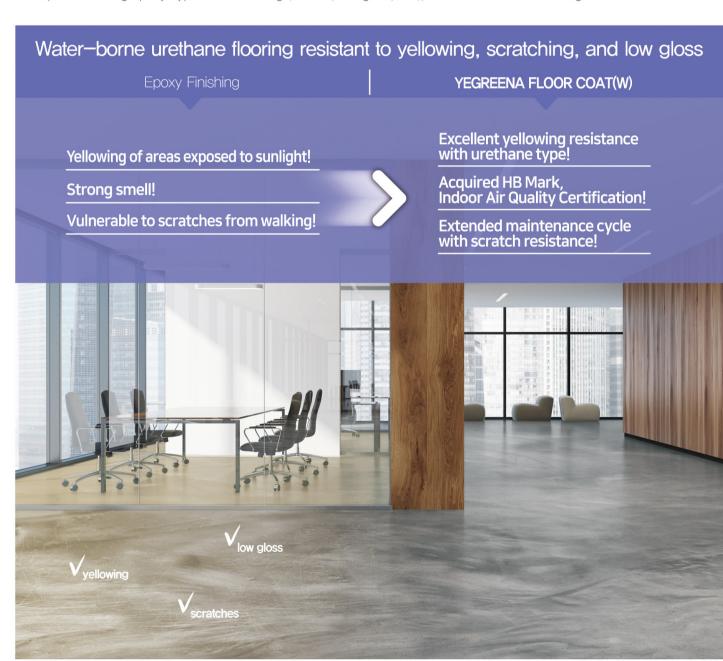

Water-borne urethane transparent decoration flooring resistant to yellowing, YEGREENA FLOOR COAT(W)

Paint type	Water-borne polyurethane resin (2-Component)
Diluent	Tap water(Max 20% by volume)
Coating Method	brush and roller
Specific gravity / Solid volume ratio	Approx 1,07 / 39±3%
Theoretical Coverage	0.14 kg/m², 7.7 m²/L
Thickness of dried film	50 μm
Re-coating interval	20°C Minimum over 3 days
Color/Gloss	Clear(Glossy/Matt)
Mixing ratio	Base(A)/hardener(B)=6/1 (Weight ratio)
Shelf life	12months (indoors at 5°C~30°C)



HB Best Certification

Strength of YEGREENA FLOOR COAT(W)

gir or rearceival record coar(w)



Excellent yellowing resistance

Urethane-type floor finish

Contrast with conventional oil-based epoxy transparency

Excellent yellowing resistance and stain resistance

Can be finished around light windows and doorways

* Yellowing test





(+)+)

A coating that is resistant to contamination and scratches



Contrast with general epoxy transparent Excellent stain resistance and scratch resistance

Keep a clean appearance for a long time

* Stain resistance test





* Scratch resistance test





* Recommended Usage

- Can be used as a repair painting and topcoat for YEGREENA COLORFLOOR, YEGREENA VINTAGE, EPOXY lining, etc.
- The concrete surface can be finished with transparent coating to give a unconventional decorative effect

^{*} After mixing base and hardener, dilute 20% with water, mix with a power stirrer, and apply with a grid (+)