

EVACOAT WASH PRIMER



QR code
for product guide

EVACOAT WASH PRIMER, a wash primer with excellent adhesion and rust prevention on pretreated galvanized surfaces and various metals!

EVACOAT WASH PRIMER is a product that gives excellent adhesion and rust prevention to not only steel and various non-ferrous metals but also pre-treated galvanized surfaces. It is the only phosphoric acid-free wash primer in Korea that satisfies KS M 6030 Class 4 standards and acquired non-combustible material.

Usage


Pretreatment primer for industrial steel and non-ferrous metals (galvanizing, aluminum, etc.)



Two-component pre-treatment primer with excellent paintability for subsequent top coat!

Paint type	Epoxy polyamide / KS M 6030 Class 4 wash primer(Two-Component)
Thinner	DR-100
Dilution ratio	Brush, roller, spray coating: less than 5%
Specific gravity	Approx. 1.3 (Based on gray color)
Solid volume ratio	Approx. 38±1%
Theoretical Coverage	25m ² / ℓ (1 time - 15μm)
Thickness of dried film	10~20μm
Color/Gloss	Gray, redbrown, ordered colors / Matte
Mixing ratio	Base(A)/Hardener(B) = 3/1 (Volume ratio)
Flash point	At least 7°C

***Floatability test of
pre-treated galvanized surface**

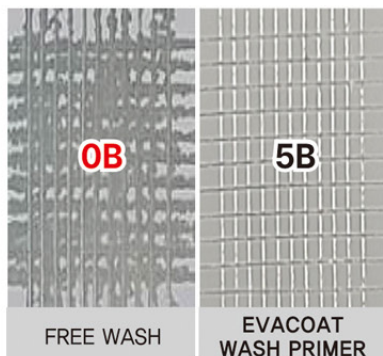

※ ASTM D 3359 evaluation : 5B > 4B > 3B > 2B > 1B > 0B
Good ←-----→ Bad

***Application case**

