



Laboratory Testing Report

| | |
|-----------------------------------|---|
| Company | Noroo Paint And Coatings |
| Contact Name | Mr. Deok-Hwan Kim deokhwan.kim@noroo.com Mr. Yun - KCL Labs csyun@kcl.re.kr Mr. Sung-Woo JUNG nrp114503@noroo.co.kr |
| Report Date | June 16, 2016 |
| Category | Detailed Performance |
| Category Type | Initial |
| IPS# | 3025-I-2016-141-12947 |
| MPI Category # | 141 |
| Product Label | Noroo paint |
| Product Name | Easycleaning Semigloss |
| Product Code | NA |
| Batch Number | 116 Apr 1114a |
| Testing Results | PASS |
| Approval Expiry Date | Approximately 2 years |
| Failure Notice | |
| Comments | |
| MPI Technical Director | Bob Welch |
| MPI Senior Admin Assistant | Nancy Janze |
| MPI Invoice # | D-2204 |

A pass report is not the final approval.

**Final approval occurs when the product is published in the MPI Approved Products List.
The MPI Approved Products List is updated by the 5th of each month.**

*2800 Ingleton Avenue, Burnaby, BC V5C 6G7 Canada
Tel: 604-298-7578 Fax: 604-298-7571
Toll-Free Tel: 1-888-674-8937, Toll Free Fax: 888-211-8708
June 16, 2016*

Easycleaning-Semigloss (MPI 141) High Performance Latex, Interior (Semigloss MPI Gloss Level5)

■GENERAL INFORMATION

This paint is based on acrylic latex, pigment and stabilizers. It is a high class Semi-Gloss Emulsion Paint with such advantages as excellent alkali resistance, water resistance, excellent durability, excellent cleansability and leveling properties for interior use. It is intended for use on new or previously painted the most suitable for walls and ceilings composed of concrete, mortar, plaster, P.C. and insulation materials.

■SUITABLE USE

Various kinds of ceilings and walls (concrete, P.C., mortar, plaster and interior wall and ceiling surface including gypsum wallboard, plaster, primed wood surfaces)

■SPECIFICATION

A. Type: Acrylic Latex/Interior/Institutional low odor

| B. Drying Times: | 5°C | 20°C | 30°C |
|----------------------|-----|------|------|
| Set to Touch | 1H | 1/2H | 1/3H |
| Dry Hard | 2H | 1H | 2/3H |
| For Over coat (Min.) | 6H | 3H | 2H |

* H: Hour

C. Consistency: Ready for use

D. Thinner: Tap-Water (Max. 10% at 1st coating,
Max. 5% at 2nd coating)

E. Specific Gravity: Appr. 1.36

F. Theoretical Coverage: 5~7 m²/L/2 coats/60μ
(Dry film thickness)

G. Shade: White and tints

H. Texture: Egg shell (Gloss 60 degree : 35 - 70)

■DIRECTION FOR USE

A. Surface Preparation

1. Eliminate oil, water, grit, dirt, marked paint and any foreign matters.

B. Preparation of Paint

1. Stir to be mixed uniformly.
2. Avoid excessive thinning.

C. Application

1. Can be applied by brush, spray.

■OTHER CAUTIONS -

1. Will not form a homogeneous film below 5°C (41°F) or at humidities greater than 95% R.H.
2. Don't store or ship the paint at temperatures less than 5°C (41°F) nor above 35°C (95°F)

3. Surface to be painted shall be prepared an instrument-measured moisture content not exceeding 8% and less than 9 pH.

* The information and data given herein are based upon tests and experiences considered reliable, and are believed to be accurate. The coverage depends on the shape of surface to be coated, surface roughness, weather conditions during application and application method, so that you are urged fully to review them prior to your practical application.

* The date of issue: 2008.12

MATERIAL SAFETY DATA SHEET

SECTION I GENERAL INFORMATION

A. PRODUCT NAME: Easycleaning- Semigloss (MPI 141)

High performance / Interior

B. MANUFACTURERS NAME: NOROO Paint & Coatings Co., Ltd.

615 PARK DAL DONG, AN YANG CITY

KYUNG KI DO, KOREA

TEL: (031)467-6150

SECTION II COMPOSITION

| CHEMICAL NAME | CAS NO | CONTENTS |
|------------------|------------|----------|
| ACRYLIC POLYMER | NOT HAZARD | 30~50 |
| WATER | 7732-18-5 | 30~50 |
| TITANIUM DIOXIDE | 13463-67-7 | 15~30 |
| CALCINED CLAY | 66402-68-4 | 0~10 |
| MICA | 12001-26-2 | 10~20 |
| S1 | - | 0~3 |

SECTION III PHYSICAL PROPERTIES

| | |
|-------------------|-------------------|
| BOILING RANGE | 200~225 deg.F |
| EVAPORATION RATE | SLOWER THAN ETHER |
| VAPOR DENSITY | HEAVIER THAN AIR |
| % VOLATILE VOLUME | 50 MAX |
| SPECIFIC GRAVITY | 1.2~1.4 |
| VISCOSITY | 90~110KU |

SECTION IV – FIRE AND EXPLOSION HAZARD DATA

FLAMMABILITY CLASSIFICATION:

FLASH POINT: NOT ESTABLISHED

LEL: N/A

EXTINGUISHING MEDIA: FOAM, ALCOHOL FOAM, CO₂, DRY CHEMICAL, WATER FOG

UNUSUAL FIRE AND EXPLOSION HAZARDS:

EXTINGUISHING MEDIA ABOVE IS RECOMMENDED ON DRIED FILMS OF THIS MATERIAL THAT IS BURNING. THIS MATERIAL IS NON-COMBUSTIBLE BUT DRIED FILMS ARE CAPABLE OF BURNING AND SUPPORTING COMBUSTION WHEN IN CONTACT WITH OPEN FLAMES.

SPECIAL FIREFIGHTING PROCEDURES:

OBSERVE RECOMMENDED PROCEDURES IN HANDLING FIRE AREAS. WEAR APPROPRIATE FIRE FIGHTING EQUIPMENT INCLUDING A SELF CONTAINED BREATHING APPARATUS.

SECTION V – HEALTH HAZARD DATA

EFFECTS OF OVEREXPOSURE:

VAPOR ODORS MAY CAUSE IRRITATION IN THE UPPER AND LOWER RESPIRATORY TRACTS, NAUSEA, HEADACHES, AND DIZZINESS. EYE CONTACT CAN CAUSE IRRITATION, REDNESS, AND VOMITING, DIARRHEA, AND GASTROINTESTINAL IRRITATION.

MEDICAL CONDITIONS PRONE TO AGGRAVATION BY EXPOSURE:

OVEREXPOSURE TO VAPORS CAN PRODUCE HEADACHES, DIZZINESS, AND NAUSEA.

PRIMARY ROUTE(S) OF ENTRY: INHALATION, INGESTION

EMERGENCY AND FIRST AID PROCEDURES:

IF AFFECTED BY VAPORS, MOVE PERSON TO FRESH AIR. APPLY ARTIFICIAL RESPIRATION

TO PERSON WHO LOSES CONSCIOUSNESS AND CALL A DOCTOR IMMEDIATELY. TREAT EYE AND SKIN CONTACT BY THOROUGHLY WASHING WITH CLEAN WATER. IF IRRITATION PERSISTS SEE A DOCTOR IMMEDIATELY. IF MATERIAL IS INGESTED AND THE PERSON IS CONSCIOUS GIVE TWO GLASSES OF WATER TO DRINK AND CALL A DOCTOR IMMEDIATELY.

SECTION VI – REACTIVITY DATA

STABILITY: STABLE

HAZARDOUS POLYMERIZATION: WILL NOT OCCUR

HAZARDOUS POLYMERIZATION INFORMATION IS NOT ESTABLISHED.

HAZARDOUS DECOMPOSITION PRODUCTS:

BURNING CAN PRODUCE CARBON DIOXIDE AND OR CARBON MONOXIDE.

CONDITIONS TO AVOID:

AVOID TEMPERATURES BELOW 40 degrees Fahrenheit. AVOID FREEZING CONDITIONS.

INCOMPATIBILITY (MATERIALS TO AVOID):

AVOID MATERIALS THAT REACT WITH WATER, ALSO STRONG ACIDS AND ALKALIS.

SECTION VII – SPILL OR LEAK PROCEDURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED:

DIKE AND ABSORB SPILLED MATERIAL WITH INERT ABSORBENT MATERIAL SUCH AS SAND, EARTH, AND SAW DUST. USE RAGS TO CLEAN UP SMALL AMOUNTS OF SPILLED MATERIAL.

WASTE DISPOSAL METHOD:

COLLECT MATERIAL CONTAMINATED ABSORBENT AND RAGS INTO A DISPOSABLE CONTAINER AND DISPOSE OF IN ACCORDANCE TO LOCAL, STATE, AND FEDERAL REGULATIONS. CONSULT WITH YOUR LOCAL HAZARDOUS WASTE REGULATIONS REGARDING LANDFILL DUMPING.

SECTION VIII – SAFE HANDLING AND USE INFORMATION

RESPIRATORY PROTECTION:

WEAR APPROVED ORGANIC VAPOR RESPIRATOR UNLESS VENTILATION EQUIPMENT IS ADEQUATE TO KEEP AIRBORNE CONCENTRATIONS BELOW THE EXPOSURE STANDARDS.

VENTILATION:

GENERAL MECHANICAL VENTILATION MAY BE SUFFICIENT TO KEEP PRODUCT VAPOR CONCENTRATIONS BELOW SPECIFIED TLV RANGES. IF INADEQUATE, USE LOCAL EXHAUST.

PROTECTIVE GLOVES:

USE IMPERMEABLE SOLVENT RESISTANT GLOVES TO PROTECT FROM SKIN CONTACT.

EYE PROTECTION:

USE SAFETY GOGGLES, CHEMICAL SAFETY GLASSES AND OR FACE SHIELDS TO PROTECT EYES

OTHER PROTECTIVE EQUIPMENT:

IMPERMEABLE APRONS AND PROTECTIVE CLOTHING ARE ADVISED WHEN WORKING WITH THIS PRODUCT. THE USE OF HEAD CAPS ARE RECOMMENDED WHENEVER POSSIBLE.

HYGIENIC PRACTICES:

EYE WASHES AND SAFETY SHOWERS IN THE WORKPLACE ARE RECOMMENDED.

SECTION IX – SPECIAL PRECAUTIONS

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING:

KEEP CONTAINERS CLOSED WHEN NOT IN USE. DO NOT STORE OR HANDLE NEAR HEAT, FLAMES AND STRONG OXIDANTS. INSPECT FOR LEAKS IN ALL CONTAINERS.

OTHER PRECAUTIONS:

DO NOT STORE IN FREEZING AREAS. KEEP ABOVE 40 degrees F. KEEP OUT OF REACH OF CHILDREN.

* * DISCLAIMER- THE INFORMATION CONTAINED HEREIN IS BASED ON DATA CONSIDERED

* * ACCURATE. HOWEVER, NO WARRANTY, WHETHER EXPRESSED OR IMPLIED IS MAE.

KOREA CONFORMITY LABORATORIES

Add.: 1029-32 Hogye-dong, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Tel.: 031-429-2308

Fax.: 031-429-2309

Url.: www.kcl.re.kr

Certificate of Testing (Inspection) Result

Sample No. of Issue : TSRB15005
 Name of Applicant : NOROO Paint & Coatings Co., Ltd. Kim Soo Kyoung
 Address of Applicant : 615, Bakdal 2-dong, Manan-gu, Anyang-si, Gyeonggi-do, Korea
 Date of Receipt : 2010-11-15
 Name of Test Sample : Easycleaning - Semigloss (MPI 141)

Result of Testing (Inspection)


| Test Items | Unit | Sample | Results | Test Method |
|------------------------------|------|--------|----------------------------|------------------|
| Consistency | K.U. | 1 | 107 | MPI # 141 : 2010 |
| Dry time, Dry hard | min | 1 | 30 | MPI # 141 : 2010 |
| Finess of Grind | NS | 1 | 7 | MPI # 141 : 2010 |
| Gloss 60 degree | - | 1 | 52 | MPI # 141 : 2010 |
| Hiding power | % | 1 | 99.8 | MPI # 141 : 2010 |
| Reflectance | % | 1 | 92 | MPI # 141 : 2010 |
| Alkali Resistance | - | 1 | pass | MPI # 141 : 2010 |
| Scrubbability | % | 1 | 8 | MPI # 141 : 2010 |
| Cleanability | - | 1 | No stain, $\angle E : 1.3$ | MPI # 141 : 2010 |
| Applicability and Appearance | - | 1 | pass | MPI # 141 : 2010 |
| Flexibility | - | 1 | pass | MPI # 141 : 2010 |
| VOCs content | g/L | 1 | Not detected | EPA-method 24 |

※ Object of Test :Quality control

The above is the result of testing (inspection) specimen provided by the applicant, and the name of sample has been submitted by the applicant

Jan. 10 2011
 month day year

Signed :

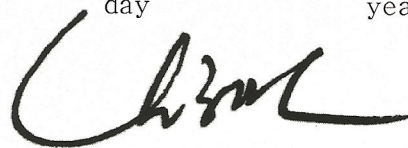

The general manager of Korea Conformity Laboratories

